



3 YEAR
WARRANTY


STD Roller Blinds

STANDARD TUBE

- Chain stopper for a non-continuous chain
- Continuous chain, 2 pcs chain stoppers will be supplied as loosen parts
- 38mm tube (Up to 1810mm width) - Spline fitted fabric
- Over 6m2 not available (Please use the GR or Acmeda components)

STANDARD DEDUCTIONS (Factory makes all deductions unless otherwise specified)

- Reveal fit
Width deduction 3mm
- Face fit
Width deduction 0mm
- Multiple blinds
In reveal use standard deduction per blind

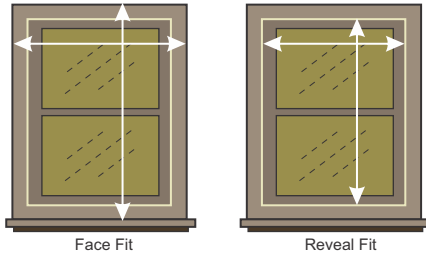

STANDARD PROJECTIONS

- Reveal Fit : 68mm
- Face fit : 51mm

MEASURING

- Pin size, outside of bracket to outside of bracket
- Skin size, edge of fabric to edge of fabric

LIMITATION

- Max width is 2900mm (subject to fabric width)
- Max drop is 3200mm
- Min width is 200mm

BRACKET COLOURS

- White, Ivory, Beige, Grey and Black.
- If the bracket colour is not nominated, the Factory will default to closest colour to match the cloth & components.
- Bracket covers are supplied as standard with face fit brackets only.
- Covers are not available for Double Bracket options.

LIGHT GAPS


- Outside of Drive end bracket to skin : 17mm
- Outside of Idle end bracket to skin : 13mm
- Idle end skin to idle end skin (separate blinds) : 26mm
- Idle end skin to idle end skin (coupled blinds) : 22mm
- Link blinds : 19mm

RAILROADING


Not recommended for any fabrics

Brackets	38 mm Dia Standard Tube System					45 mm Dia Standard Tube System				
	Standard	38 mm Dual	Dependant linked	Independent Linked	Dep & Ind Linked	Standard	45 mm Dual	Dependant linked	Independent Linked	Dep & Ind Linked
Minimum Width	200	200	200	200	200	200	200	200	200	200
Maximum Width (contigent on fabric)	1810	1810	1810	1810	1810	3000	3000	3000	3000	3000
Maximum Drop	2400	2400	2400	2400	2400	3200	3200	3200	3200	3200
Maximum Linked Blinds	-	-	2	2	4	-	-	3	2	4
Max Combined Area Of Linked Blinds	6 m2		8 m2	12 m2	12 m2	6 m2		12 m2	12 m2	12 m2
Standard Projection - Face Fit	68mm	160mm	68mm	68mm	68mm	68mm	160mm	68mm	68mm	68mm
Standard Projection - Reveal Fit	51mm	100mm	51mm	51mm	51mm	51mm	100mm	51mm	51mm	51mm
Bracket colours	White, Ivory, Grey & Black									


STD ROLLER COMPONENTS

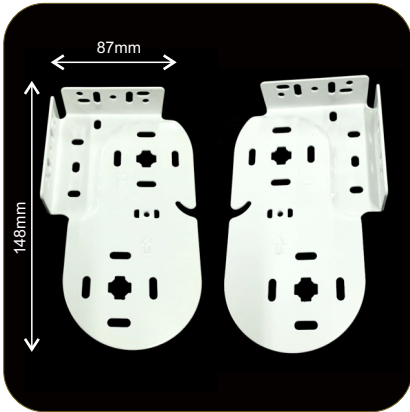

Double Bracket Standard system

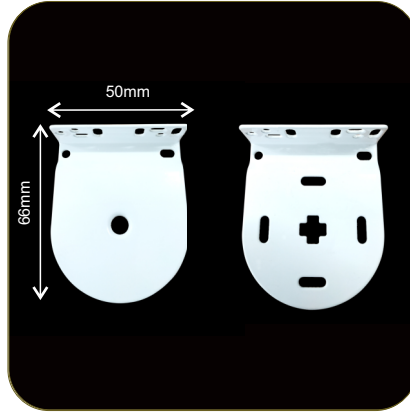


38mm Bracket

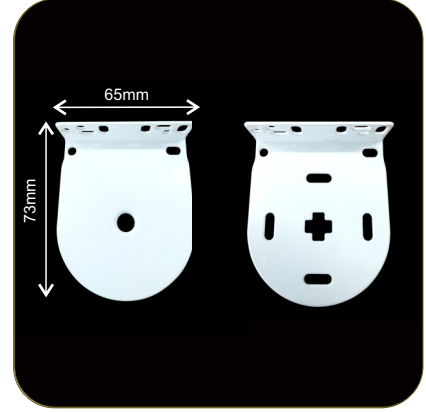

45mm Bracket



Control Mechanism
38mm and 45mm

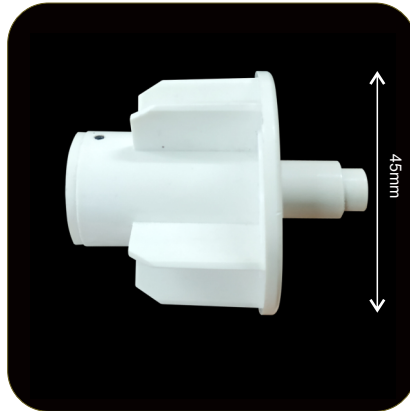

Idle end
38mm and 45mm



90 deg Angled Linked
Roller Mechanism



135 deg Angled Linked
Roller Mechanism



Dependant Linked Roller Blinds



Independant Linked Roller Blinds

OPTIONAL CONTROL SYSTEMS

• **Standard Roller Blind**


A single chain operated roller blind, manual operation.

• **Motorisation**

- Motor Lite 12V Battery Operated
- Minimum width is 600mm | - Must not exceed 6 sqm
- Motor Mate 240V Hard Wired
- Minimum width is 700mm | - Must not exceed 8 sqm


• **Dependant Linked Roller Blinds**

Up to 3 blinds linked together by an intermediate bracket, with single chain control. Using the linked system reduces light gaps between the blinds

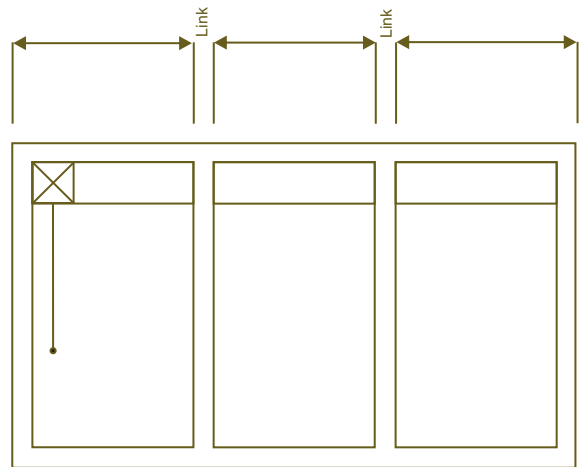

• **Independent Linked Roller Blinds**

2 blinds linked together by an intermediate bracket, with separate chain controls for each blind. Using the linked system reduces light gaps between the blinds

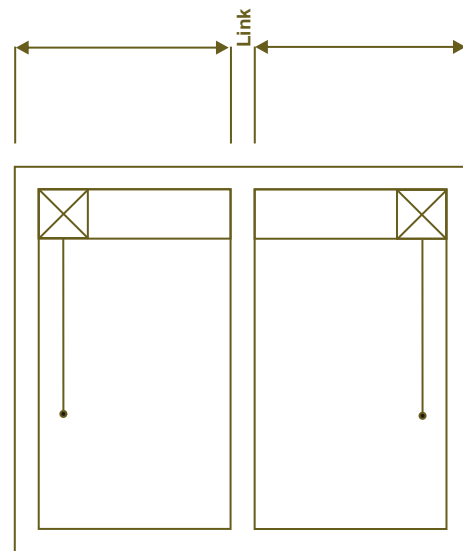

FABRIC PELMET

Available on request. Refer to fabric pelmet specification for information



ROLL OPTIONS

• **Standard (normal) roll**

Blind fabric falls back closest to the window.
Standard roll is recommended to minimize light and help with insulating



• **Reverse (front) roll**


Blind fabric falls towards the room.
This method is used to hide block-out backing & minimize light gaps for blinds in bay windows etc



CHAIN COLOURS

Standard non-continuous chains come with a chain joiner
Plastic continuous chains available in lengths of 250, 500, 750, 1200 & 1500mm only
Nickel & Stainless Steel chains are also available in a continuous length (nominate) -
* Stainless Steel chains (add surcharge)
If chain stoppers are required on a continuous chain, nominate on the order form.

The colour may vary and is a representation only

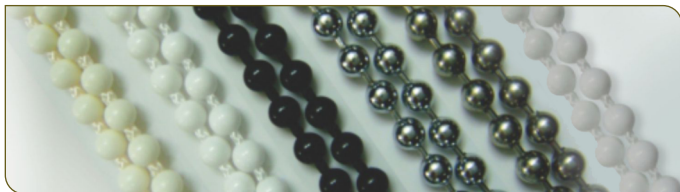

Ivory plastic chain White plastic chain Black plastic chain Nickel plated steel *Stainless steel chains Grey plastic chain



Chain anchor clip (child safety requirement)


BASE BAR



20mm Round - left to right: Black, Ivory, White, Silver



Flat - left to right: Black, Silver, Ivory, White

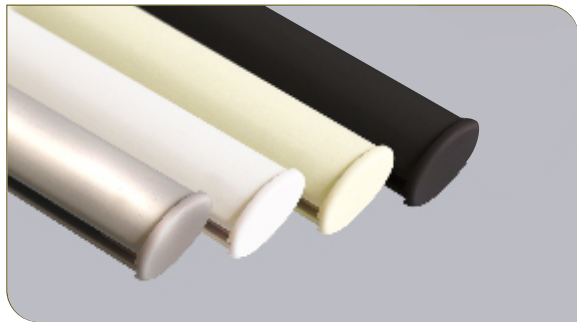

Oval - left to right: Silver, White, Ivory, Black



Front Covered Fabric



Back Covered Fabric

Flat bottom-rail must nominate back or front to be covered




Flat bottom-rail with mohair
Only available in Silver
(a surcharge applies)



Factory Standard
Front covered fabric only



Plain Trim (Concealed),
Enclosed PVC rail in a
sewn bottom pocket



Decorative Trim (Gymp)


DECORATIVE TRIMS (A SURCHARGE APPLIES)

Available for block-out & translucent fabrics only; not available for screen fabrics.

Refer to below trim options.

Trims are all approximately 150mm deep with matching gymp.


For trim styles 4, 6, 9, 16, 17, X, there will be additional light gaps on the bottom of a reveal fit blind.



FABRIC WAVE

Large roller blinds will show fabric wavering, this is because it is impossible to make a large piece of fabric hang perfectly flat. This generally appears on rollers with widths greater than 2000mm and/or drops greater than 3000mm.

Consider splitting the blind into two smaller widths and linking them together.




FABRIC PATTERNS

For a roller blind with a patterned fabric, the pattern grain won't usually line up perfectly with the horizontal or vertical edges of the blind. Expect to see a variation of up to a few centimeters along the pattern direction from one side of the blind to the other.




OVERALL MEASUREMENTS

It will be assumed that all the provided widths are 'opening size', factory takes all deductions unless make size specified.



LIGHT BLEED

All roller blinds allow light to pass around the sides of the fabric (even with blackout fabric). Consider using face fit as an option rather than reveal fit.



CUPPING

Roller blinds with blackout fabrics will usually show some cupping on each of the vertical edges. Cupping of up to a few centimeters will be considered within an acceptable allowance.



BAY WINDOWS

When measuring blinds for a bay window you are required to calculate the width deductions. Accurate measurements are important to ensure the blind fits on install; it is important to specify if the provided measurements are taken from the front or the back of the reveal. DO NOT supply measurements taken from a mid-point in the reveal.



GENERAL MAINTENANCE

Most roller blinds simply require regular vacuuming with an upholstery attachment.

STAIN REMOVAL

To remove, sponge blind clean with a damp cloth. Use diluted washing liquid in warm water & avoid rubbing the stain. Do not immerse blinds in water.

SPOT CLEANING

Small dry marks may be rubbed off with a gum-based eraser.

